

commercial

Speed Queen®

Extra Heavy Duty Topload Washer

LWS42MW-3050

- Pull to start multi-cycle timer knob
- Two-speed 1/2 HP Motor
- Seven cycles; three temperatures
- Adjustable water level control
- 92 litre capacity stainless steel tub
- Wavy vane agitator with fabric softener dispenser
- 240/50/1 - 10 amp circuit
- Bleach dispenser
- W x D x H: 651mm x 711mm x 1092mm



Saves space with the narrowest width in full size side by side washer and dryer.



1335 mm




Additional Features

• **Multi-cycle timer** with user-friendly free-wheeling timer knob for start and cycle selections.



• **Adjustable temperature controls** with energy saver designation.



• **Infinite water level switch** matches water level with load size.

• **Extra large stainless steel tub** becomes smoother with each use so clothes are less likely to snag.


• **Automatic bleach dispenser**

• **PolyTuff® agitator** with high vanes and extra long 210° agitation stroke delivers superior washability for all load sizes.



• **Automatic balancing suspension system**

with rear self-leveling legs maximizes smooth and quiet operation on all floor types. **High speed extracts of 710 rpm** maximizes moisture removal for fast drying.

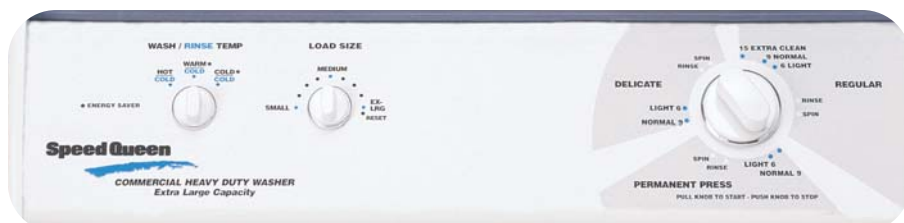

Water Manager™ Efficiency


Adjustable Water Level Control

Setting	Description	Total Water Consumption
Low	Energy Setting	83.27 L.
High	Extra Large	174.11 L.

Commercial Built Better To Last Longer!

Specifications

Model	LWS42	Features	LWS42
Speeds	2	Self-Cleaning	•
Cycles	7	Lint Filter	
Reg.-Extra Clean	•	Water Levels	Variable Rotary
Reg.-Normal	•	Wavy Vane	•
Reg.-Light	•	Agitator	
Perm Press-Normal	•	Basket Volume	92 Litre (Extra Large)
Perm Press-Light	•	Top & Lid Finish	Tuff Guard
Delicate-Normal	•	Stainless Steel Tub	•
Delicate-Light	•	Bleach Dispenser	•
		Liquid Additive Dispenser	•
Water Temp.	3	Colors	White
Hot/Cold	•	Self-Adjusting	•
Warm/Cold	•	Rear Leveling Legs	
Cold/Cold	•		
Dimensions		Motor: 1/2 HP reversing, permanently lubricated with a built-in automatic thermal overload protector.	
Width	651 mm (25-5/8")	Electrical Requirements: Grounded 3-wire, 240V, 50 Hz AC, 10 amp circuit separately fused. Heights may vary slightly depending on leveling adjustments. Speed Queen's continuing commitment to quality products may mean a change in specifications without notice.	
Depth	711 mm (28")		
Machine Height	1092 mm (43")		
Cabinet Height	910 mm (36")		
Approx. Weight	80 kg (177 lbs.)		

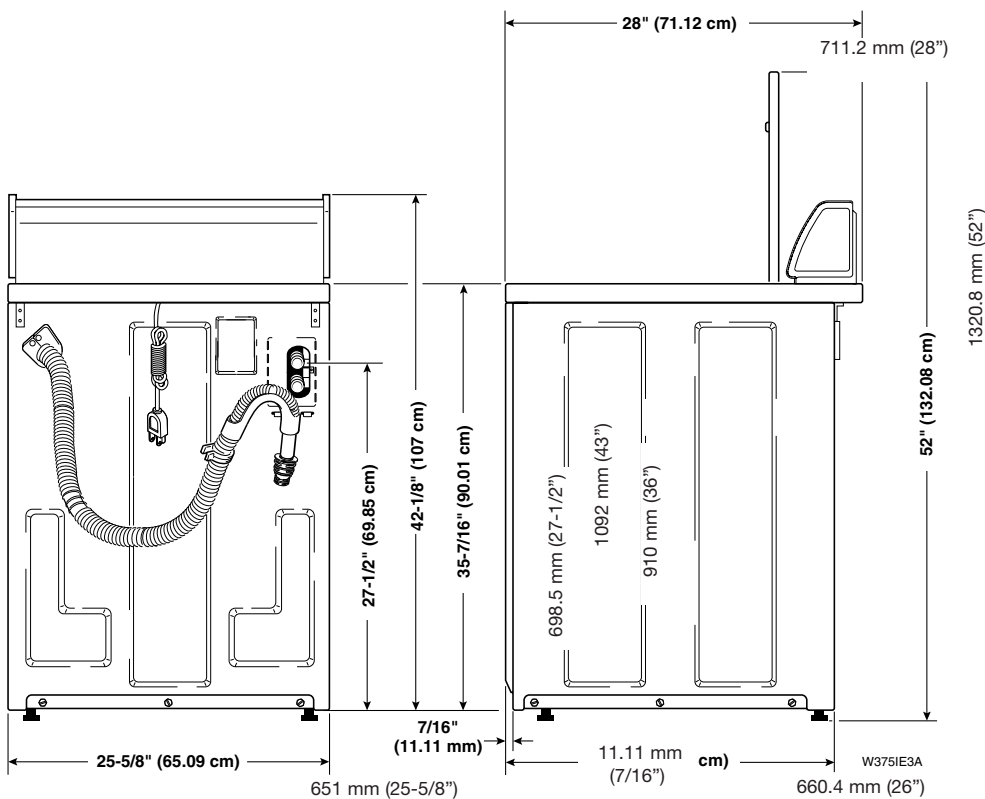

Ph: 1800 30 40 30



www.andrewbarton.com.au