

Ironers

UniMac Heated Roll Flatwork Finisher




55" (1400 mm)
63" (1600 mm)
75" (1900 mm)
78" (2000 mm)
98" (2500 mm)
126" (3200 mm)



- Polished steel cylinder.
- Excellent quality of drying and ironing by the pressing roll.
- Temperature controlled by thermostatic regulator.
- No wax required.
- No lubrication required.
- Electronic frequency controlled drive motor.
- Equipped with feed belts for easy and safe feeding of the linen.
- Safety guard on feed belts.
- Very compact size.
- Excellent quality finish of linen.



Side Views

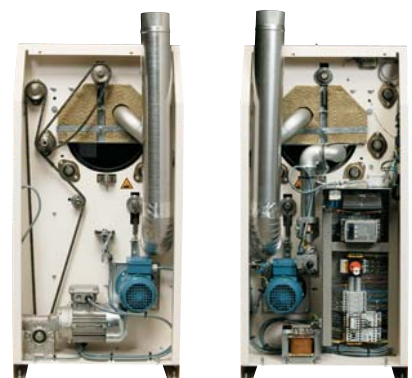

UniMac Heated Roll Flatwork Finisher Specifications


Models	UD08F055	UD13F063	UD13F078	UD20F075	UD20F098	UD20F126
Roll Diameter - in (mm)	8" (200)	13" (325)	13" (325)	20" (500)	20" (500)	20" (500)
Finishing Width - in (mm)	55" (1400)	63" (1600)	78" (2000)	75" (1900)	98" (2500)	126" (3200)
Ironing Speed - ft/m (m/m)	3-15 (1-4.5)	3-30 (1-9)	3-30 (1-9)	3-30 (1-9)	3-30 (1-9)	3-30 (1-9)
Overall Dimensions* L" x D" x H" - in (mm)	74" x 17.5" x 43.7" (1880 x 445 x 1110)	86" x 26" x 43.8" (2192 x 661 x 1113)	100.1" x 26" x 43.8" (2542 x 661 x 1113)	117.1" x 42.2" x 46.1" (2975 x 1072 x 1171)	140.7" x 42.2" x 46.1" (3574 x 1072 x 1171)	168.3" x 42.2" x 46.1" (4275 x 1072 x 1171)
Roll Motor - HP (kW)	.33 (.25)	.33 (.25)	.33 (.25)	.5 (.37)	.5 (.37)	.5 (.37)
Roll Exhaust Motor - HP (kW)	1 x .12 (.09)	2 x .16** (2 x .12**)	2 x .16 (2 x .12)	2 x .34*** (2 x .25***)	2 x .34 (2 x .25)	2 x .34 (2 x .25)
Roll Exhaust Duct - in (mm)	1 x 3.25" (83)	2 x 4**** (2 x 98**)	2 x 4" (2 x 98)	2 x 6**** (2 x 150****)	2 x 6" (2 x 150)	2 x 6" (2 x 150)
Gas Heating						
Maximum Gas Input - Btu (kW)	N/A	76,792 (23)	102,340 (30)	136,453 (40)	187,623 (55)	235,495 (69)
Gas Inlet - in (mm)	N/A	3/4" (14)	3/4" (14)	1" (22)	1" (22)	1" (22)
Electrical Requirements • Circuit Breaker		230/50/1 • 15 400/50/3 • 6	230/50/1 • 15 400/50/3 • 6	230/50/1 • 15 400/50/3 • 6	230/50/1 • 15 400/50/3 • 6	230/50/1 • 15 400/50/3 • 6
Electric Heating						
Capacity Resistances - HP (kW)	14 (10.5)	21 (16)	27 (20)	42 (31.5)	54 (40.5)	72 (54)
Electrical Requirements • Circuit Breaker	400/50/3 • 40	400/50/3 • 45	400/50/3 • 60	400/50/3 • 70	400/50/3 • 80	400/50/3 • 110
Steam Heating						
Steam Inlet - in (mm)	N/A	N/A	N/A	3/4" (19.5)	3/4" (19.5)	3/4" (19.5)
Condensate Return - in (mm)	N/A	N/A	N/A	1/2" (12.7)	1/2" (12.7)	1/2" (12.7)
Hourly Consumption - lb/hr (kg/hr)	N/A	N/A	N/A	110 (50)	147 (67)	187 (85)
Min.-Max. Steam Pressure - Psi (bar)	N/A	N/A	N/A	145 (10)	145 (10)	145 (10)
Shipping Weight - lb (kg)	418 (190)	1320 (599)	1474 (669)	2167 (984)	2796 (1269)	3421 (1553)
Approvals	ETL, CE	CSA, ETL, CE	CSA, ETL, CE	CSA, ETL, CE	CSA, ETL, CE	CSA, ETL, CE

* Removal of trays will allow 32" door access on all models.

** One motor on electric models.

*** One motor on steam models.

Due to continuous product improvements, design and specifications subject to change without notice.

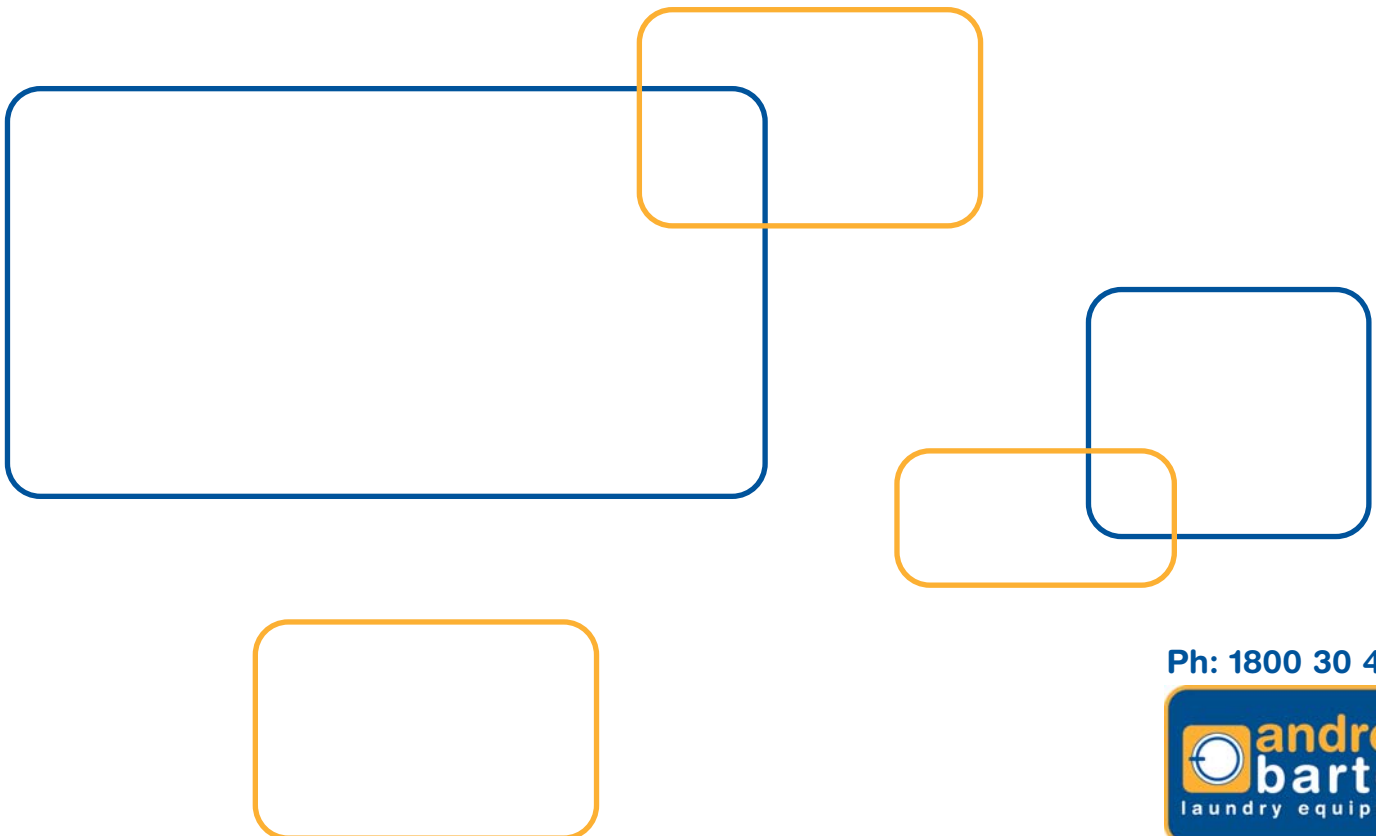

Ph: 1800 30 40 30



www.andrewbarton.com.au